



DOUBLE SCISSOR LIFT

3000kg 400V

Model: VL7230A



The thoughtful design of Falco bridges saves you time and effort. The focus is on ease of use and an efficient work flow. The different models are developed for various applications.

This Falco Sollevatori ASLP scissor lift with four hydraulic cylinders is high-quality and extremely suitable for professional use.




VL7230A



General features

- super low minimum lift height of 112mm
- total platform length of 2010mm
- electric hydraulic double trans pump
- equipped with four hydraulic cylinders
- automatic venting by means of bleed button
- automatic synchronisation by means of
- electric solenoid valves
- hydraulic synchronisation by means of master-slave system
- automatic overload protection
- control valve for controlling the lowering speed
- limit sensors for limiting the max. lifting height and the min. safety height
- deadman's handle for lifting and lowering
- foot protection including acoustic safety signal

Size overview

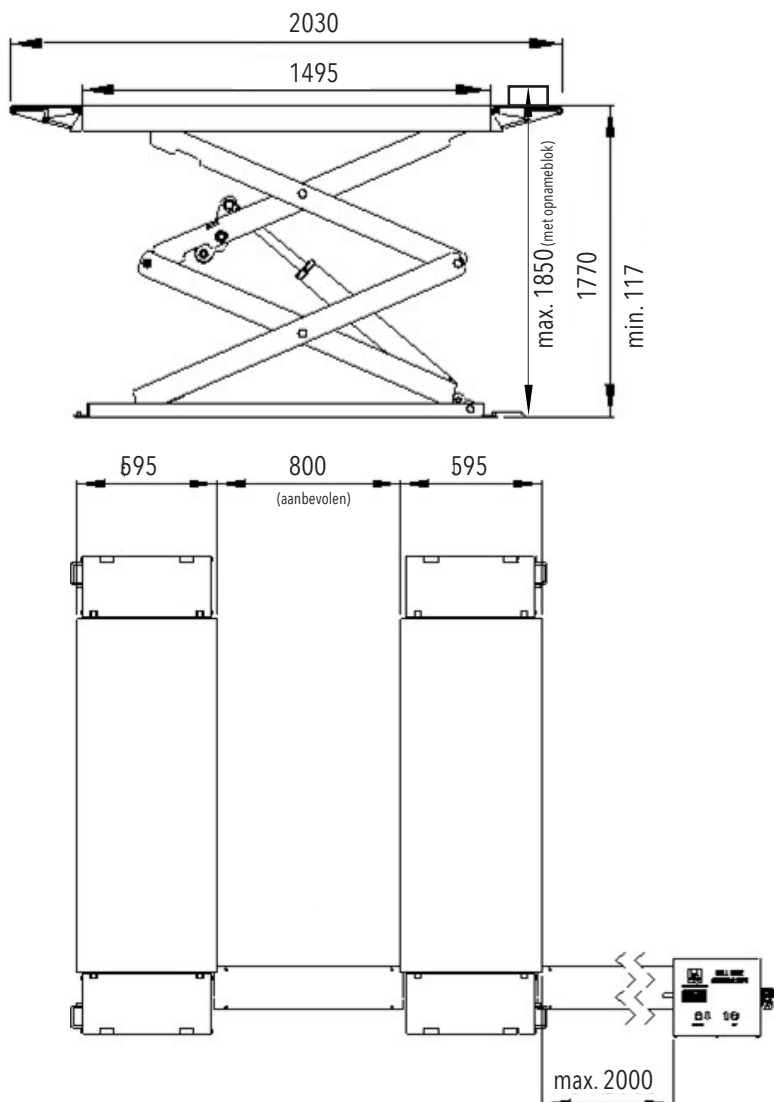

Technical specifications

capacity	3000 kg
voltage	400 V- 3 fase
platform length	1495 - 2030 mm
width of platforms	595 mm
min. take-up height	117 mm
maximum lifting height	1850 mm
weight	850 kg
oil tank capacity	10 ltr



<< incl. lifting pads
< photocell synchronisation (security)



<< handy adjustable ramp - extension
< master - slave system

All Falco's truck bridges comply with the NEN-EN1493 safety standard and are supplied with a Dutch-language manual including maintenance protocol and CE certificate 2006/42/EC.

